


Flowmeters

5YEAR
warranty

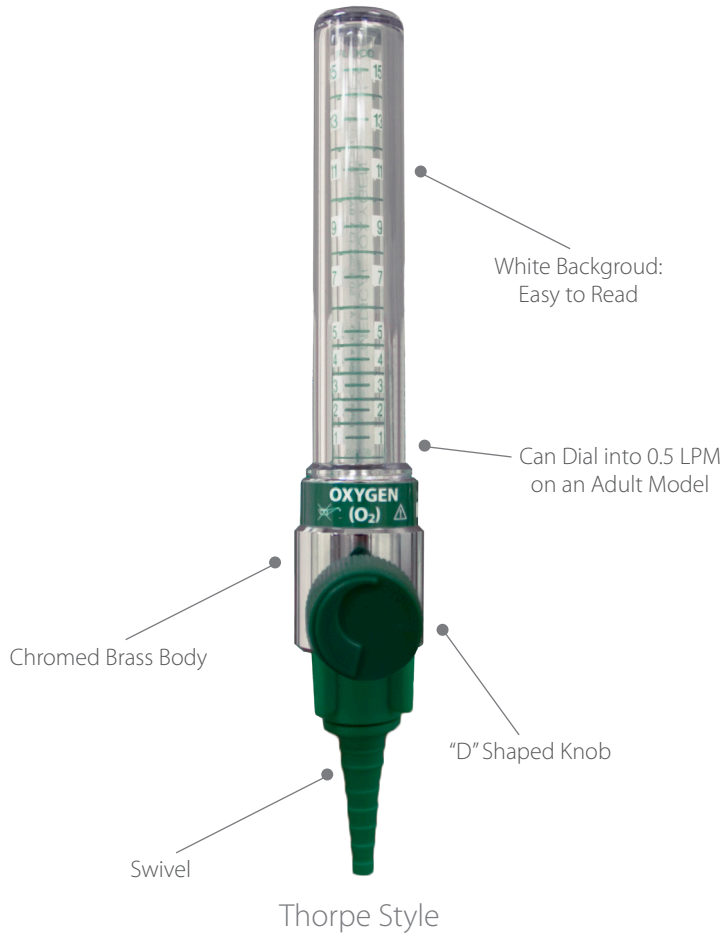

Features:

- Complete line of Flowmeters from Neonatal to Adult
- Available in standard Thorpe Style and Dial Style
- Standard 1/8" FNPT connection, but also customizable with different adapters and accessories
- MRI options are available
- Available in USA and ISO colors
- Smallest and lightest chromed, brass bodied Flowmeter in the industry
- Color coded inner tube and labeling
- Easy to service
- No strip "D" shape knob
- Includes an inlet filter and inlet extension



Dual/Y-block Flowmeter Assembly



Non-Removable
Flowmeter

Dual Outlet with Flowmeter


Accessories:



Reusable Humidifier



Disposable Humidifier



Swivels/Christmas Trees



Power Takeoff

Dial Style



Oxygen Dial Flowmeter



Medical Air Dial Flowmeter

Features:

- Available in Oxygen in 25, 15, 8 and 4 LPM
- Available in Medical Air in 25 and 15 LPM
- Smallest and lightest in the industry
- Smallest increment is 1/32
- Gas specific color-coded labeling
- Encased in an anodized aluminum housing
- Easy to read window


Thorpe Style Technical Specifications

Physical			
Dimensions	5.6" H x 2.7" W (14.22 cm x 6.86 cm)		
Weight	6 oz (170 g)		
Flow Range	Oxygen:	0 - 70 LPM	Medical Air: 0 - 70 LPM
		0 - 15 LPM	0 - 15 LPM
		0 - 8 LPM	
		0 - 3.5 LPM	
		0 - 1 LPM	
		0 - 200 CC	
<ul style="list-style-type: none"> • Back pressure compensated so flow accuracy is not affected by restrictions • Calibrated at 50 psi • Serialized for ease of identification 			

Dial Style Technical Specifications

Flow Range	Oxygen:	0 - 25 LPM	0, 1, 2, 3, 4, 6, 8, 10, 12, 15, 20, 25
		0 - 15 LPM	0.5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15
		0 - 8 LPM	0.5, 1, 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8
		0 - 4 LPM	0, 0.03, 0.06, 0.12, 0.25, 0.5, 0.75, 1, 1.5, 2, 3, 4
	Medical Air:	0 - 15 LPM	0.5, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15
		0 - 25 LPM	0.5, 1, 2, 4, 6, 8, 10, 12, 15, 20, 25
<ul style="list-style-type: none"> • Calibrated at 50 psi • Serialized for ease of identification 			

Model Number FMX-XXY-XX(YY)*

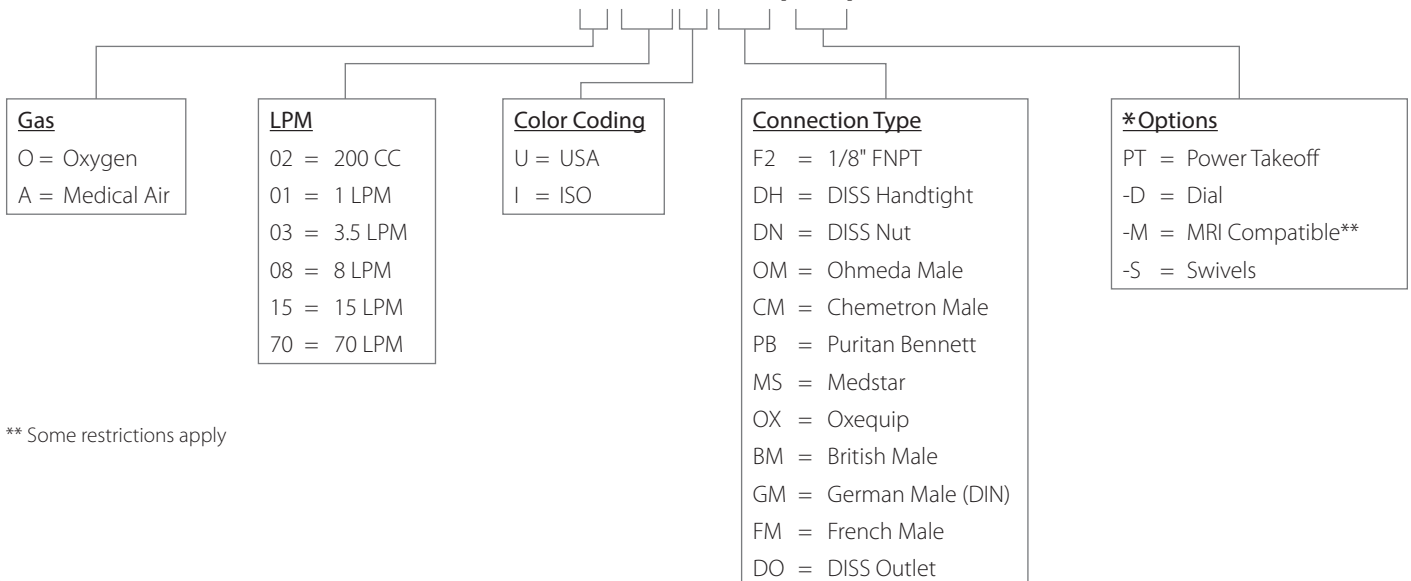

** Some restrictions apply

