Gas Control Panel





Features:

- Inlet and outlet pressure display gauges in psi/kPa
- Manual shut-off valve
- Outlet supply pipe for remote mounted outlets
- 3/8" (9.5 mm) internal tubing for high flow
- High flow capacity regulator
- Wall mount with adjustable brackets for different wall thicknesses
- Aluminum front simplifies cleaning
- Maximum supply pressure 250 psi (1,724 kPa)
- DISS maximum delivery pressure:

Carbon Dioxide	=	80 psi (551 kPa)
Nitrogen	=	200 psi (1,379 kPa)
Instrument Air	=	200 psi (1,379 kPa)
HP (High Pressure)	=	250 psi (1,723 kPa)
Safety Swing Coupling		

General Specifications:

The Gas Control panel shall be an Amico Alert-1 series.

The control panel shall be supplied with a quarter turn shutoff ball valve, rated at no less than 300 psi (2,069 kPa).

The unit shall have an inlet pressure indicator valve that indicates the inlet supply pressure from 0 - 400 psi (0 - 2,750 kPa).

The pressure regulator shall be adjustable between 0 - 250 psi (0 - 1,724 kPa).

The outlet controlled pressure shall be monitored by a pressure indicator with a range of 0 - 400 psi (0 - 2,750 kPa).

The DISS outlet shall be a Diameter Index Safety System (D.I.S.S.) For Air or Nitrogen Service Outlet or "Safety Swing Coupling" for pressures above 200 psi. The outlets shall be used for connection to pneumatic surgical tools.

The controls shall be mounted in an 1.3 mm (#18 gauge) galvanized steel enclosure, with adjustable bracket for different wall thicknesses.

The unit shall be factory tested for intended gas service.


The Gas Control Panel meets CSA and NFPA requirements.

Amico products comply with NFPA-99.

Project

Amico

Technical Specifications

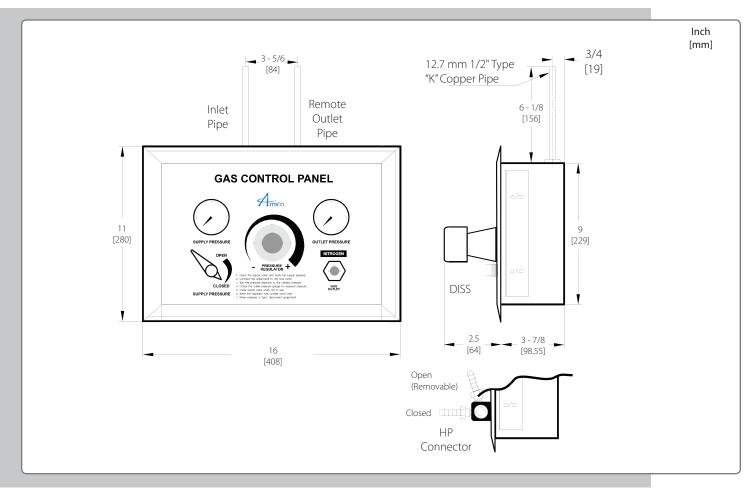

Model Numbers

N-CONP-E-REL	=	Nitrogen - Gas Control Panel - NFPA, relieving
N-CONP-E-HP-REL	=	Nitrogen - Gas Control Panel High Pressure - NFPA, relieving
N-CONP-E-REL-C	=	Carbon Dioxide - Gas Control Panel - NFPA, relieving
N-CONP-U-REL-I	=	Instrument Air - Gas Control Panel - NFPA, relieving
N-CONS-E-REL	=	Nitrogen - Gas Control Panel Schraeder - NFPA, relieving
NOTE		

NOTE:

N-X-CON-ADA-B25 = High pressure adaptor with 1/4" hose barb (supplied with HP Gas Control Panel)

Distributed By:



Amico Corporation 85 Fulton Way, Richmond Hill, ON L4B 2N4, Canada | 71 East Industry Court, Deer Park, NY 11729, USA Toll Free Tel: 1.877.462.6426 | Toll Free Fax: 1.866.440.4986 | Tel: 905.764.0800 | Fax: 905.764.0862

www.amico.com